



802.15.4 ADAPTERS FOR
SERIAL AND USB DEVICES



DIGI XBEE-PRO® 802.15.4 ADAPTERS

Remote monitoring and control for multipoint networks.


Digi XBee-PRO 802.15.4 adapters provide low-cost, low-power wireless point-to-multipoint networking of electronic devices. They are ideal for enabling wireless connectivity to sensors, controllers and other devices in legacy wired applications, without the development time required for embedded solutions.

These small adapters are available in externally powered, battery powered and power harvesting options. Adapters are offered in a wide range of physical interfaces, including RS-232, RS-485, USB, Digital I/O and Analog I/O interface options.

BENEFITS

- 802.15.4 wireless connectivity for RS232, 485 and USB devices
- Compatible with Digi XBee gateways and modules
- Small form factor for easy handling and installation
- Hardened design with extended operating temperature (-40° C to +70° C) for hazardous locations

APPLICATION EXAMPLE

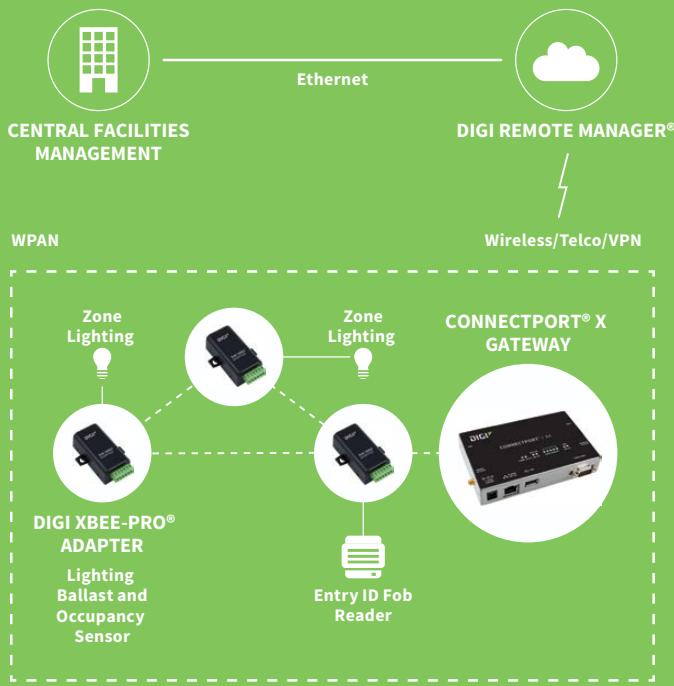

RELATED PRODUCTS



Gateways



Modules



Network Extenders



Sensors




Development Kits

SPECIFICATIONS



Digi XBee-PRO® 802.15.4 Adapter

PERFORMANCE	
RF DATA RATE	250,000 bps
INDOOR/URBAN RANGE	300 ft
OUTDOOR/RF LINE-OF-SIGHT RANGE	Up to 1 mile
TRANSMIT POWER	60 mW (+18 dBm)
RECEIVER SENSITIVITY (1% PER)	-100 dBm
FEATURES	
ANTENNA TYPE	Integrated whip antenna
FREQUENCY BAND	2.4 GHz
SERIAL DATA INTERFACE	RS-232 (DB-9M) RS-485 (6-position wire terminal block) - Switch selectable between RS-422 half duplex, RS-422 full duplex and RS-485 Sensor (RJ-45)
USB DATA INTERFACE	USB 2.0 Full Speed (with ESD protection); connects to host via captive 2-meter cable
NETWORKING & SECURITY	
NETWORK TOPOLOGIES	Point-to-Point, Point-to-Multipoint, Peer-to-Peer
NUMBER OF CHANNELS	12 channels
SPREAD SPECTRUM TYPE	Direct Sequence Spread Spectrum
FILTRATION OPTIONS	PAN ID, Channel, 264 (64-bit) addresses
OTHER	
LEDS	Power: Glows green when external power is supplied (not active when battery powered to limit power drain) Associate: Blinks when unit is connected and associated on an RF network
CONTROLS	Device reset (internal push button); Identification (internal push button) – relays ID to gateway
DIMENSIONS (L X W X H) & WEIGHT	RS-232, RS-485, AIO, DIO models: 3.87 in x 1.68 in x 0.99 (9.84 cm cm x 4.26 cm x 2.53 cm) 2.29 oz (64.92 g) USB models: 2.87 in x 1.80 in x 0.83 in (7.29 cm x 4.57 cm x 2.10 cm) 1.60 oz (45.36 g)
OPERATING TEMPERATURE	-40° C to +70° C
POWER REQUIREMENTS	
INPUT VOLTAGE	RS-232, RS-485, AIO, DIO models: 9-30 VDC USB models: Bus powered (+5V)
POWER CONSUMPTION	USB: 70 mA Rx and 250 mA Tx (normal operation) / 200 uA (suspend mode)
REGULATORY APPROVALS	
EMISSIONS	FCC Part 15.247, IC, CE, Telec, EN55022 (Class A)
SAFETY	UL60950
ROHS	Yes

DIGI XBEE 232, 485, SENSOR, ANALOG I/O, DIGITAL I/O

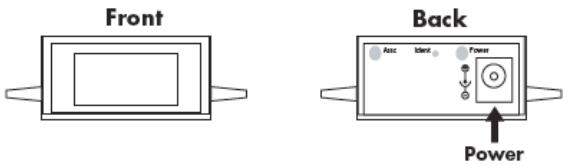


INTERFACE OPTIONS



DIGI XBEE USB - BACK



INTERFACE OPTIONS



PART NUMBERS	DESCRIPTION
XA-A14-CE1P	Digi XBee-PRO 802.15.4 USB Adapter
XA-A14-CE1P-J	Digi XBee-PRO 802.15.4 USB Adapter (International)
XA-A14-CS2P	Digi XBee-PRO 802.15.4 RS-232 Adapter
XA-A14-CS3P	Digi XBee-PRO 802.15.4 RS-485 Adapter
XA-A14-CS4P	Digi XBee-PRO 802.15.4 Digital I/O adapter

FOR MORE INFORMATION
PLEASE VISIT WWW.DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2017 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91003524
A3/917

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

